



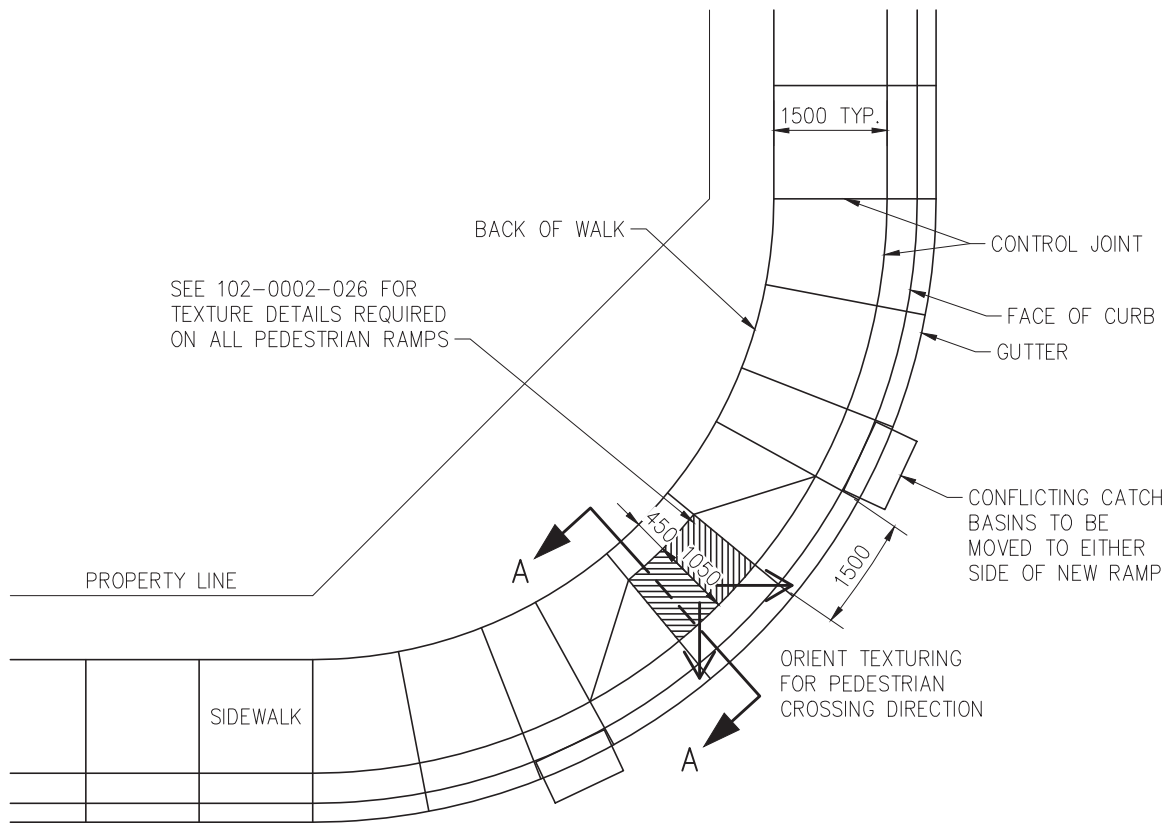

PEDESTRIAN RAMP
SCALE 1:100

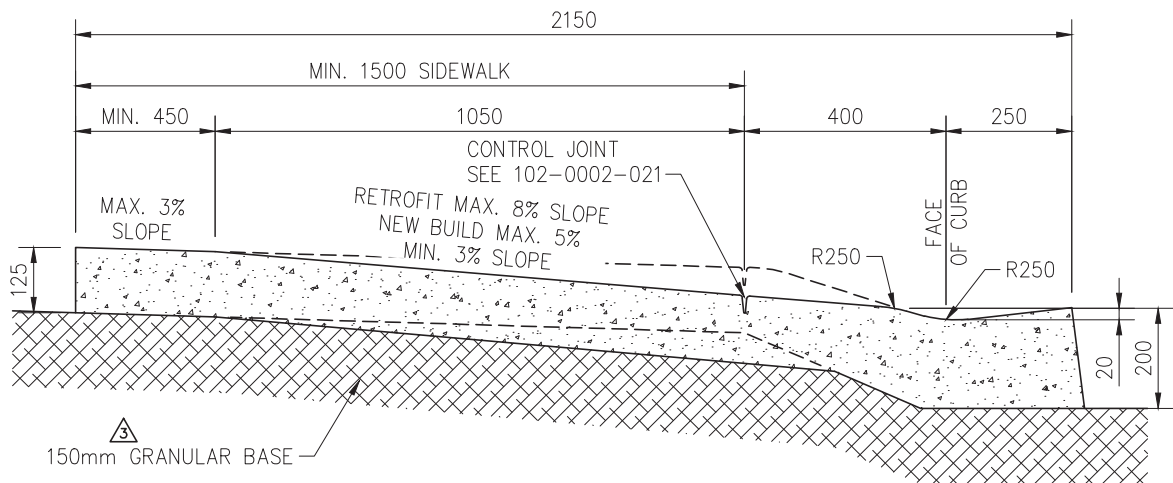

SECTION A-A
SCALE 1:15

NOTES:

1. CONCRETE STANDARD:
32 MPa DURA-MIX CONCRETE
5-8% AIR AS PER SPEC.
2. COMPACTION STANDARD:
98% STANDARD PROCTOR AS PER SPEC.
3. BROOM FINISH WALK, CURB FACE & GUTTER.
BROOM OVER ALL CONTROL JOINTS.
4. SPACING OF CONTROL JOINTS TO BE 1.5m.
5. SIDEWALK WIDTH VARIES ACCORDING TO STREET CLASSIFICATION REQUIREMENTS.

PLAN DESCRIPTION/REVISION			DATE	BY	 City of Saskatoon PEDESTRIAN RAMP ROLLED CURB	APPROVALS		
1	ORIGINAL STANDARD DRAWING		1999-FEB-01	RO		Sapieha, Katie Digitally signed by Sapieha, Katie Date: 2025.04.14 08:11:50 -06'00' SIGNATURE NAME DATE SIGNED Jurkiewicz, Matt Digitally signed by Jurkiewicz, Matt Date: 2025.05.01 13:28:23 -06'00' SIGNATURE NAME DATE SIGNED		
2	UPDATED TO ALIGN WITH THE DESIGN & DEVELOPMENT STANDARDS		2020-FEB-13	PRZ				
2	MANUAL AND POLICY C07-030 – STREET DESIGN		2020-FEB-13	PRZ				
3	UPDATED TO ALIGN WITH SIDEWALK BEST PRACTICES REPORT		2020-OCT-07	DLH				
4	REVISED STANDARDS		2024-NOV-28	SJK				
				</				