


WATER METER SECTION

306-975-2538

NOTE:

1. FULL PORT BALL VALVE UPSTREAM.
2. CLEARANCE AROUND METER: 500mm(20") TO SIDES AND 1000mm(39") IN FRONT.
3. *BYPASS IS NOT REQUIRED.* CONTACT WATER METER SECTION FOR APPROVAL REQUIREMENTS.
4. METER SPACING: (M.I.P. TO M.I.P.)
38mm(1 1/2") - 370mm(14 1/2")
50mm(2") - 465mm(18 1/4")
5. PREFERRED IN AREA WITH FLOOR DRAIN WITHIN 2000mm(78").
6. APPROVED BACK FLOW ASSEMBLY IS TO BE INSTALLED DOWNSTREAM OF METER.
7. ALLOW ADEQUATE ROOM FOR TESTING OF APPROVED BACK FLOW ASSEMBLY.
8. THERE SHALL BE NO TAPS, TAKE-OFFS OR TIE-INS TO THE SERVICE PLUMBING UPSTREAM OF THE APPROVED BACK FLOW ASSEMBLY.
9. THERE SHALL BE NO BYPASSES AROUND THE APPROVED BACK FLOW ASSEMBLY UNLESS THE BYPASS IS FITTED WITH A APPROVED BACK FLOW ASSEMBLY OF THE SAME TYPE.
10. APPROVED BACK FLOW ASSEMBLY, APPROPRIATE FOR THE HAZARD CLASSIFICATION MUST BE INSTALLED WITHIN 3m OF SERVICE ENTRY.
11. THE OWNER SHALL PROVIDE A SUITABLE SITE FOR THE WATER METER AT A HORIZONTAL SETTING, WITHIN 2m OF POINT OF ENTRY FOR THE WATER SERVICE CONNECTION INSIDE THE BUILDING AS PER BYLAW #7567.
12. CORP. COUPLING/PIPING MUST BE SECURED SO THAT THE SERVICE IS HELD FIRMLY IN PLACE.
13. IF SERVICE IS GREATER THAN 50mm SEE FIGURE 3 OR 4

HORIZONTAL 500mm(20")
VERTICAL 500mm(20")
SEE FIGURE 4 FOR
PARALLEL INSTALLATION

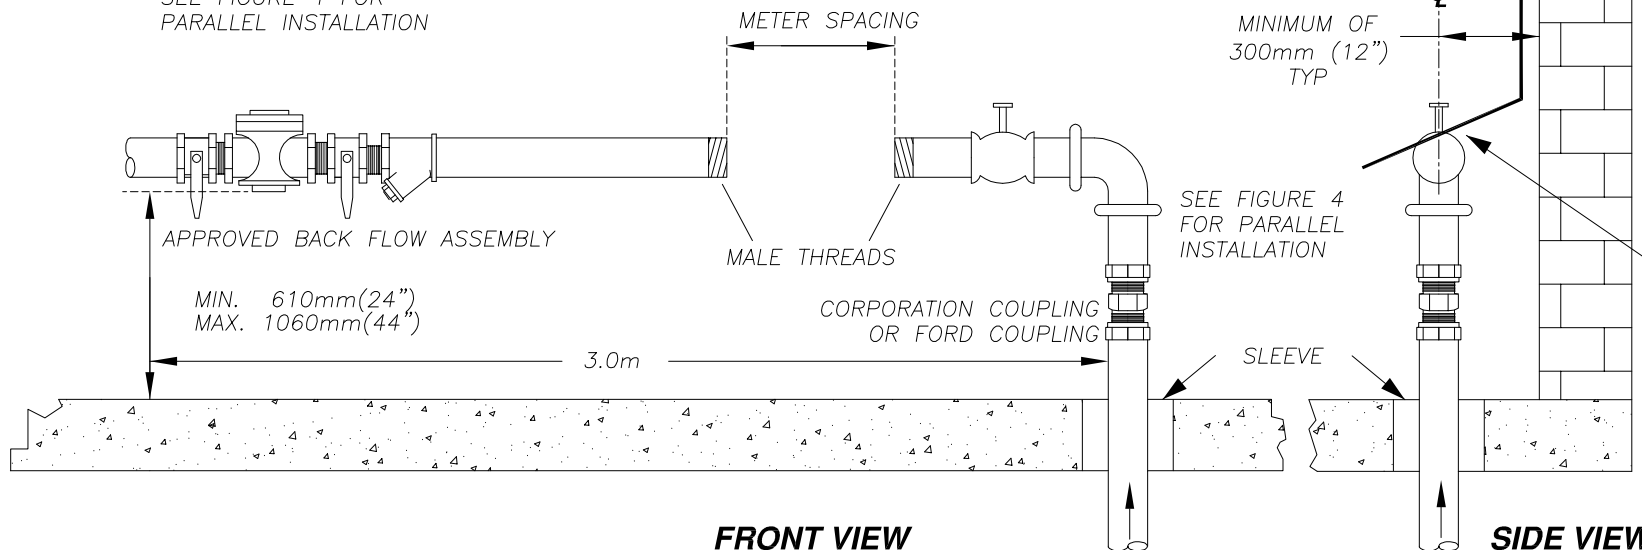

31			
30			
29			
28			
27			
26			
25			
24			
23			
22			
21			
20			
19			
18			
17			
16			
15			
14			
13			
12			
11			
10			
9			
8			
7			
6			
5			
4			
3			
2			
1			
PLAN DESCRIPTION/REVISION	DATE	BY	SEALS & STAMPS

2016-May-24 DMR
2015-SEP-16 CJP
2011-JUN-30 TPD



**City of
Saskatoon**

Transportation & Utilities Department
Saskatoon Water

WATER TREATMENT

FIGURE 2
TYPICAL INTERMEDIATE WATER METER
INSTALLATION (1 1/2" - 2" METER)

CONTRACT NO.

SHEET NO. SCALES: HORIZONTAL NTS
SHEETNO VERTICAL NTS

PLAN NO.
701-9306-003R003