


WATER METER SECTION **306-975-2538**

NOTE:

1. BACKFLOW PREVENTION DEVICE TO BE INSTALLED DOWNSTREAM FROM METER SETTING
2. ALLOW ADEQUATE ROOM FOR TESTING OF APPROVED BACK FLOW ASSEMBLY.
3. THERE SHALL BE NO TAPS, TAKE-OFFS OR TIE-INS TO THE SERVICE PLUMBING UPSTREAM OF THE BACKFLOW PREVENTER.
4. THERE SHALL BE NO BYPASSES AROUND THE BACKFLOW PREVENTER UNLESS THE BYPASS IS FITTED WITH A APPROVED BACK FLOW ASSEMBLY OF THE SAME TYPE.
5. APPROVED BACK FLOW ASSEMBLY, APPROPRIATE FOR THE HAZARD CLASSIFICATION MUST BE INSTALLED WITHIN 3m OF SERVICE ENTRY.
6. THE OWNER SHALL PROVIDE A SUITABLE SITE FOR THE WATER METER AT A HORIZONTAL SETTING, WITHIN 2m OF POINT OF ENTRY FOR THE WATER SERVICE CONNECTION INSIDE THE BUILDING AS PER BYLAW #7567.
7. CORP. COUPLING /PIPING MUST BE SECURED SO THAT THE SERVICE IS HELD FIRMLY IN PLACE.
8. METER SPACING (MIP TO MIP) 50mm (2") – 465mm (18 1/4").
9. CLEARANCE AROUND METER 500mm (20") TO SIDES 1000MM (39") IN FRONT

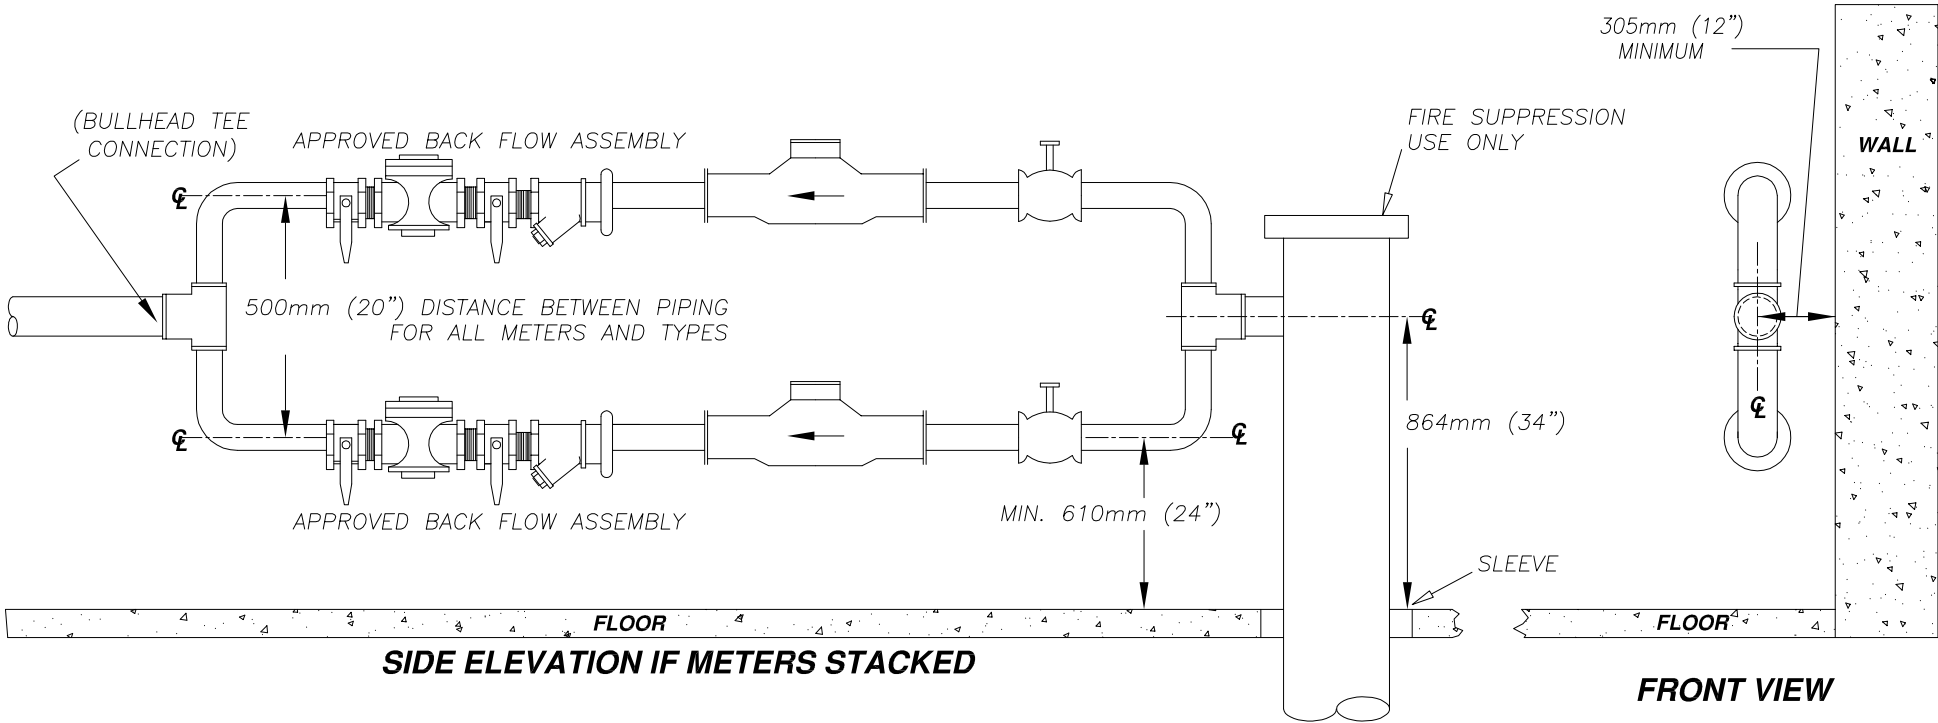

11			
10			
9			
8			
7			
6			
5			
4	Deleted Plan View, Revised Side Elevation	2016-MAY-24	DMR
3	Revised Bullhead Tee in Elevation View	2016-MAR-10	CJP
2	Changed number system, Title block, Added Corporation Coupling	2015-SEP-16	CJP
1	Plan completed by TPD June 20, 2011 - Revision 3	2011-JUN-30	TPD
	PLAN DESCRIPTION/REVISION	DATE	BY

SEALS & STAMPS



City of Saskatoon
Transportation & Utilities Department
Saskatoon Water

WATER TREATMENT

FIGURE 4
SCHEMATIC – LAYOUT OF PARALLEL
WATER METERS (NO BYPASS)

CONTRACT NO.	
SHEET NO.	SCALES: HORIZONTAL: NTS
SHEET NO.	VERTICAL: NTS
PLAN NO.	
701-9306-005R004	