




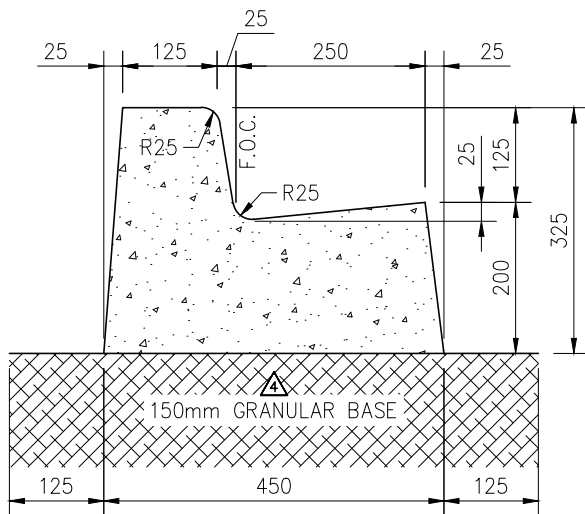


150mm VERTICAL C&G

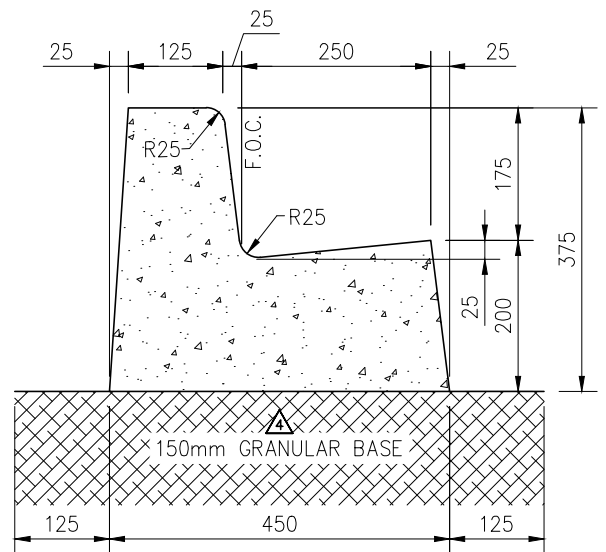

200mm VERTICAL C&G

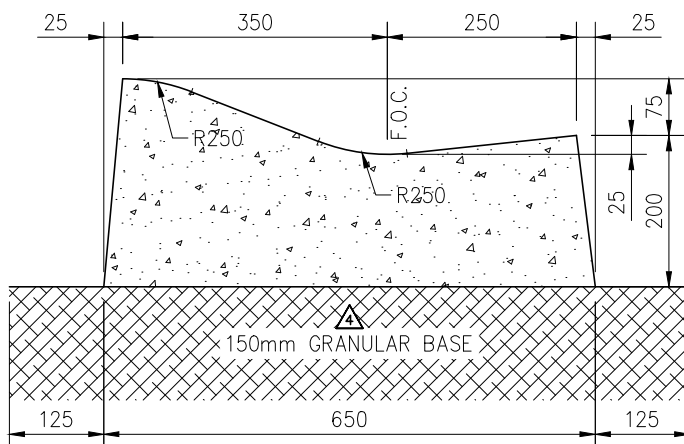

ROLLED CURB & GUTTER

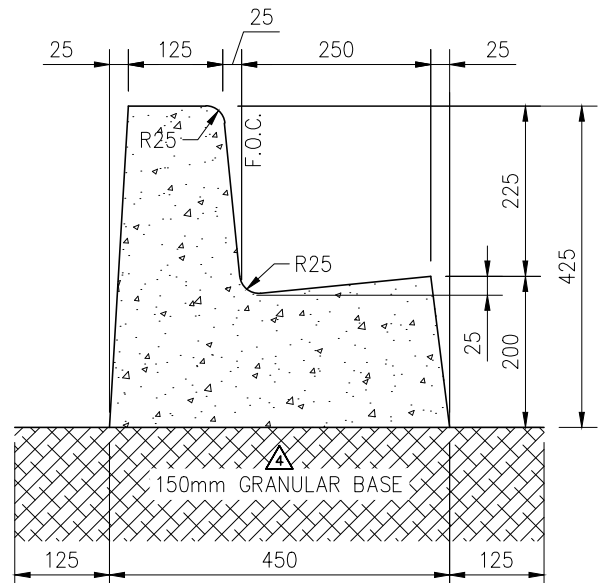

250mm VERTICAL C&G
APPROVED FOR USE AT TRANSIT STOPS

NOTES:

1. CONCRETE STANDARD:
32 MPa DURA-MIX CONCRETE
5-8% AIR AS PER SPEC.
2. COMPACTION STANDARD:
98% STANDARD PROCTOR AS PER SPEC.
3. BROOM FINISH TOP & FACE OF CURB AND GUTTER LONGITUDINALLY.
BROOM OVER ALL CONTROL JOINTS.
4. SPACING OF CONTROL JOINTS TO BE 1.5m

PLAN DESCRIPTION/REVISION			DATE	BY			APPROVALS	
							SIGNATURE	SIGNATURE
1	ORIGINAL STANDARD DRAWING		1999-JUN-23	RO	FULL HEIGHT CURBS WITH GUTTER			
2	REMOVED CONCRETE SWALE		2012-DEC-14	HLO			NAME	NAME
3	ADDED 250mm VERTICAL CURB & GUTTER		2020-JAN-31	PRZ			Chris Duriez	Maciej Jurkiewicz
4	UPDATED TO ALIGN WITH SIDEWALK BEST PRACTICES REPORT		2020-SEP-08	DLH			Jan 25, 2021	Jan 25, 2021
							DATE SIGNED	DATE SIGNED
							SCALES:	PLAN NO.
							HOR. 1:10	102-0002-001r004
							VERT. 1:10	