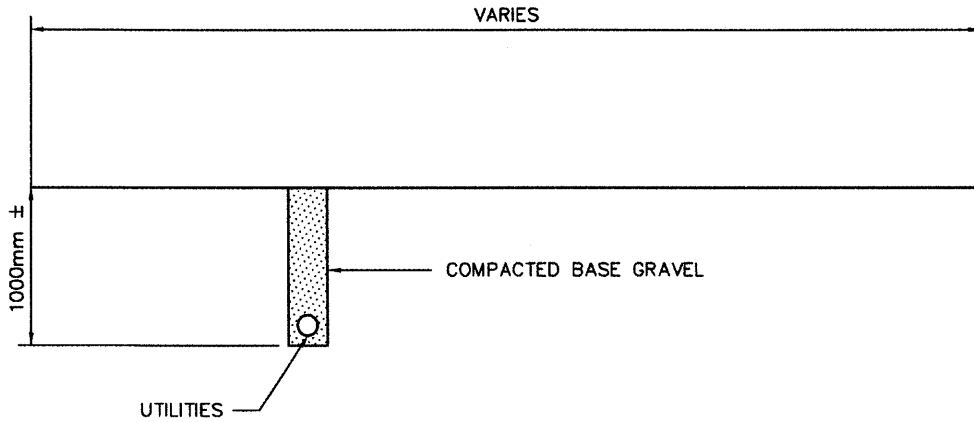





TYPICAL GRAVEL LANE



- \* FILL BASE GRAVEL SHALL BE PLACED IN 150MM LIFTS (MAXIMUM) AND COMPACTED TO 95 PERCENT OF STANDARD PROCTOR DENSITY AT EXISTING FIELD MOISTURE CONTENT.
- \* ALL EXCAVATION MATERIAL IS TO BE HAULED TO AN APPROVED DISPOSAL SITE AWAY FROM THE CONSTRUCTION AREA.

1. ALL UTILITY CONSTRUCTION AND MAINTENANCE ACTIVITY INVOLVING EXCAVATION IN A CITY STREET OR LANE RIGHT-OF WAY MUST BE REPORTED TO THE CONSTRUCTION & DESIGN DIVISION CITY OF SASKATOON.
2. REPAIRS/RESTORATION OF THE STREET/LANE SURFACE SHALL BE DONE AS SHOWN.

REVISIONS		 <b>City of Saskatoon</b> Transportation & Utilities Department	 CHIEF ENGINEER
1	CC 02-04-08		DATE <b>JAN 08 2016</b>
2	HLO 06-01-20		DATE <b>JAN 08 2016</b>
3	REVISED DIVISION NAME 2015-DEC-01 HLO	<b>UTILITIES PLACEMENT STANDARDS</b>	 ENGINEER
DRAWN BY <u>RAV</u> DATE <u>98-11-06</u>			DATE <b>JAN 08 2016</b>
SCALES : HOR. NTS VERT.			PLAN NO. 102-0007-005r003