


- ③ 300mm min for 19mm ϕ pipe
- 400mm min for 25MM ϕ pipe

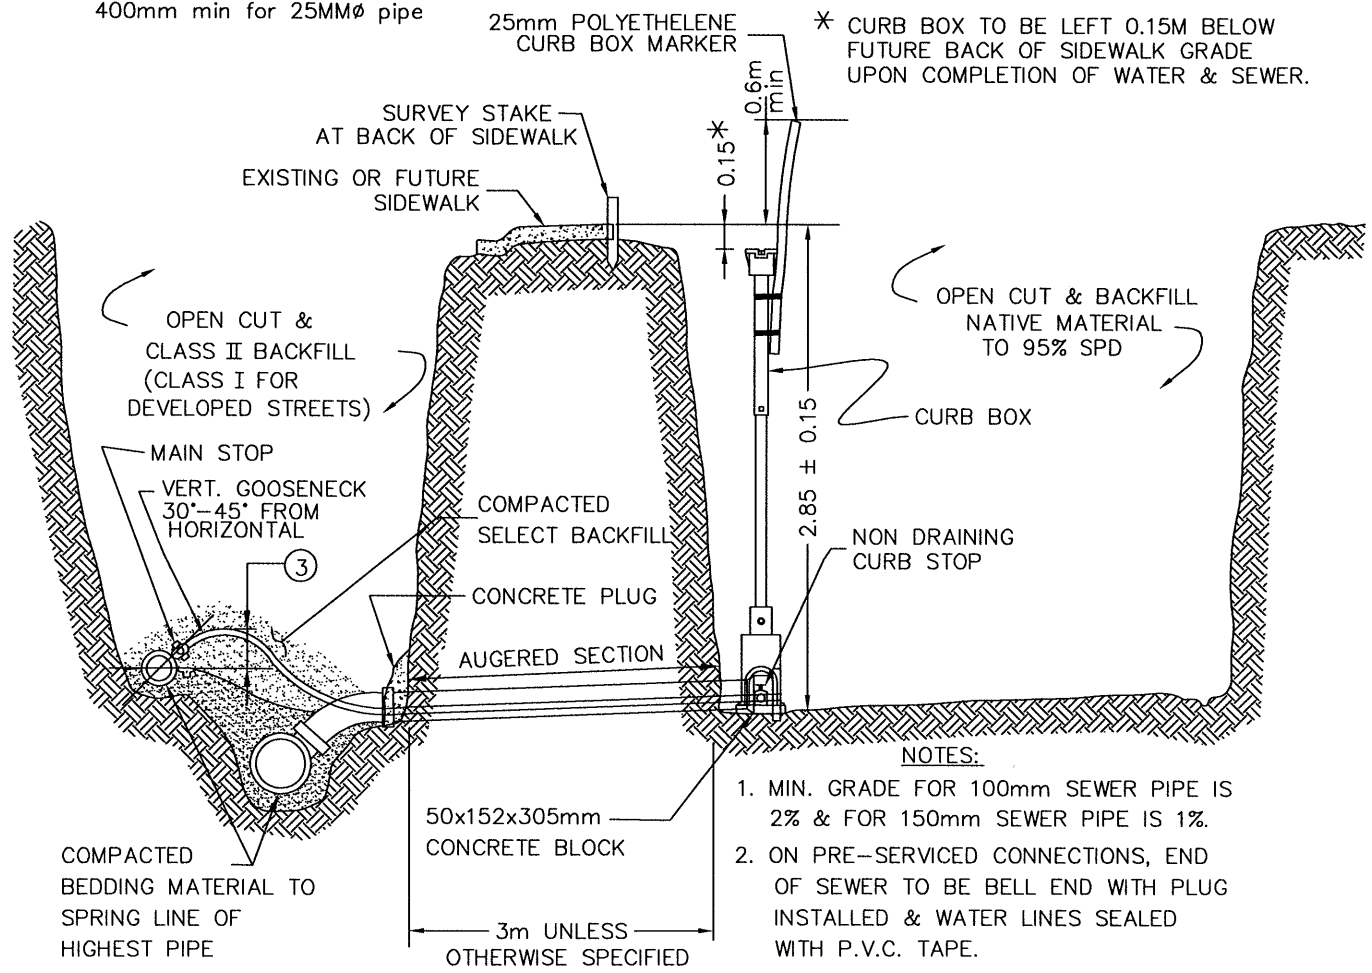

* CURB BOX TO BE LEFT 0.15M BELOW FUTURE BACK OF SIDEWALK GRADE UPON COMPLETION OF WATER & SEWER.

NOTES:

1. MIN. GRADE FOR 100mm SEWER PIPE IS 2% & FOR 150mm SEWER PIPE IS 1%.
2. ON PRE-SERVICED CONNECTIONS, END OF SEWER TO BE BELL END WITH PLUG INSTALLED & WATER LINES SEALED WITH P.V.C. TAPE.

REVISIONS	
1	RBY 02/07/2000
2	JMH 22/01/2003
3	JMH 30/04/2003
4	ADDED NOTES REGARDING CURB BOX HEIGHT & MARKER HLO 20/11/2009
5	CHANGE NOTE REGARDING CURB BOX HEIGHT REQUIREMENT HLO 2013-DEC-11
DRAWN BY G.R.F.	
DATE MAR. 30, 1992	



City of Saskatoon
Infrastructure Services Department

TYP. SEWER & COPPER WATER
SERVICE CONNECTION

APPROVED

[Signature] JUN 6, 19
GENERAL MANAGER P. ENG.

ENGINEER
[Signature]

ENGINEER

SCALES : HOR. NTS VERT. _____

PLAN NO. 102-0013-002r005