


SEPARATE SIDEWALK & CURB


Δ = 60°-70° FOR COMMERCIAL APPLICATION  
 Δ = 45°-60° FOR INDUSTRIAL APPLICATION

NOTES:

1. CONCRETE STANDARD:  
32 MPa DURA-MIX CONCRETE  
5-8% AIR AS PER SPEC.
2. COMPACTION STANDARD:  
98% STANDARD PROCTOR AS PER SPEC.
3. BROOM FINISH WALK TRANSVERSELY.  
BROOM FINISH CURB & GUTTER  
LONGITUDINALLY.
4. BROOM OVER ALL CONTROL JOINTS.
5. SPACING OF CONTROL JOINTS TO BE 1.5m

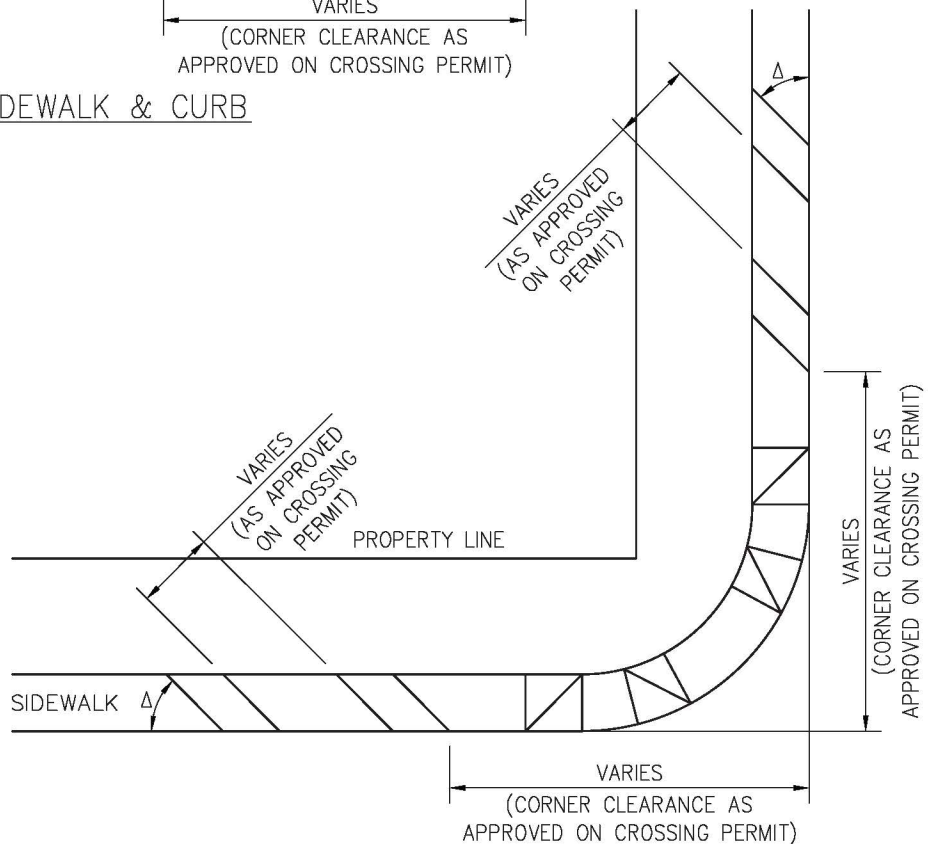

COMBINED SIDEWALK & CURB

PLAN DESCRIPTION/REVISION			DATE	BY	APPROVALS	
1	ORIGINAL STANDARD DRAWING		1999-FEB-01	RO	 Chelsea Lanning (Apr 22, 2020) SIGNATURE Chelsea Lanning NAME Apr 22, 2020 DATE SIGNED	
2	UPDATED TO ALIGN WITH THE DESIGN & DEVELOPMENT STANDARDS		2020-FEB-13	PRZ		
2	MANUAL AND POLICY C07-030 - STREET DESIGN		2020-FEB-13	PRZ		
					DIRECTIONAL CROSSING CORNER LOCATION	
					SCALES: HOR. 1:200 VERT.	
					PLAN NO. 102-0002-016r002	