



PEDESTRIAN RAMP
SCALE 1:100

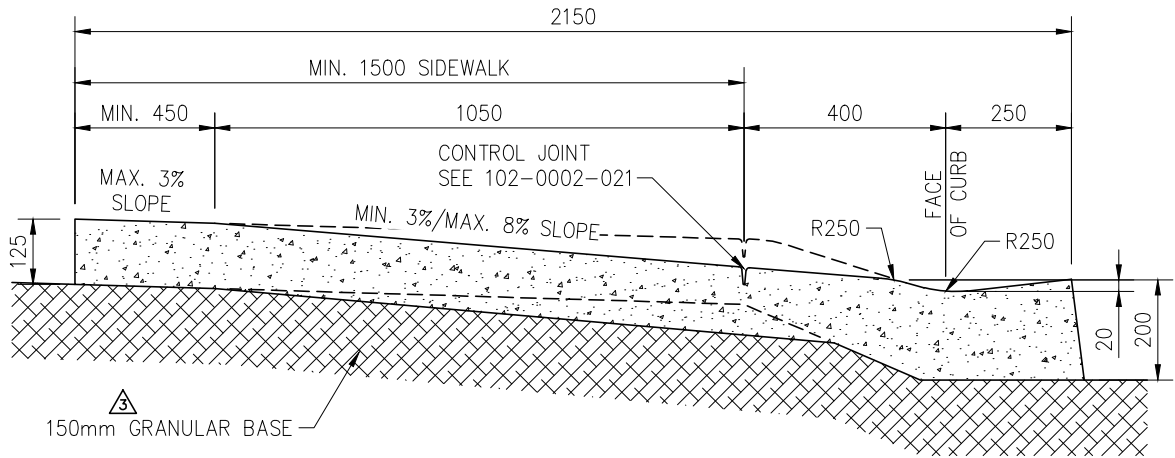

SECTION A-A
SCALE 1:15

NOTES:

1. CONCRETE STANDARD:
32 MPa DURA-MIX CONCRETE
5-8% AIR AS PER SPEC.
2. COMPACTION STANDARD:
98% STANDARD PROCTOR AS PER SPEC.
3. BROOM FINISH WALK, CURB FACE & GUTTER.
BROOM OVER ALL CONTROL JOINTS.
4. SPACING OF CONTROL JOINTS TO BE 1.5m.
5. SIDEWALK WIDTH VARIES ACCORDING TO STREET CLASSIFICATION REQUIREMENTS.

PLAN DESCRIPTION/REVISION			DATE	BY	APPROVALS	
1	ORIGINAL STANDARD DRAWING		1999-FEB-01	RO	<i>Chris Duriez</i>	<i>Maciej Jurkiewicz</i>
2	UPDATED TO ALIGN WITH THE DESIGN & DEVELOPMENT STANDARDS		2020-FEB-13	PRZ	SIGNATURE Christopher Duriez	SIGNATURE Maciej Jurkiewicz
2	MANUAL AND POLICY C07-030 - STREET DESIGN		2020-FEB-13	PRZ	NAME J	NAME Jan 25, 2021
3	UPDATED TO ALIGN WITH SIDEWALK BEST PRACTICES REPORT		2020-OCT-07	DLH	DATE SIGNED	DATE SIGNED
 PEDESTRIAN RAMP ROLLED CURB					SCALES:	PLAN NO.
					HOR. AS NOTED	102-0002-027r003
					VERT.	