


**NOTE**

1. TEE & JUNCTION TO BE SUPPORTED TO UNDISTURBED SOIL WITH POURED IN PLACE SULPHATE RESISTANT CONCRETE, MAX. 20mm AGGREGATE.
2. BACKFILL EXCAVATION IN LIFTS, COMPACTED GRANULAR MATERIAL TO 150mm MIN. REQUIRED AROUND CASING.
3. RECORD ALL RISER MEASUREMENTS AS INSTALLED AND SUPPLY TO C.O.S. WATER & SEWER DIV.



REVISIONS	
1	RBY 02/02/2000
2	
3	

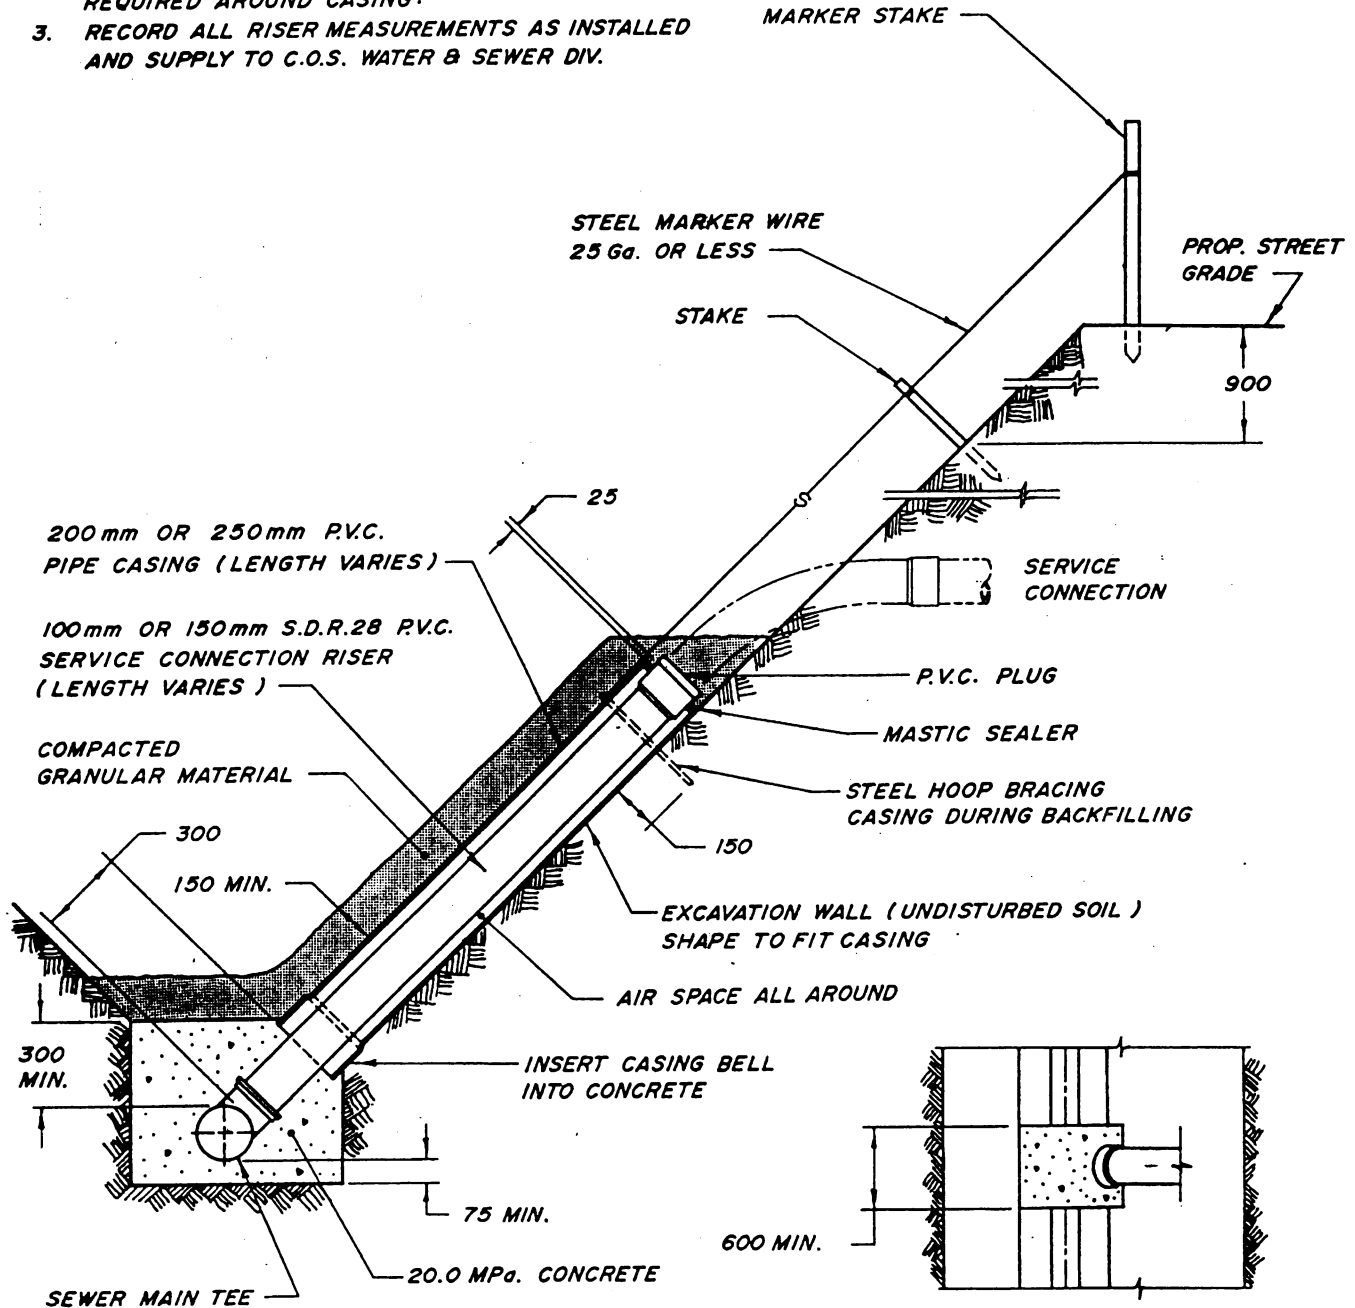

APPROVED  
*[Signature]*  
 GENERAL MANAGER P. ENG.  
*A. Boyko*  
 ENGINEER

DRAWN BY L.C.I.  
 DATE APR. 1, 1992  
 CHECKED BY \_\_\_\_\_  
 DATE \_\_\_\_\_

P.V.C. SERVICE CONNECTION  
 RISER ASSEMBLY

ENGINEER \_\_\_\_\_  
 SCALES: HOR. N.T.S. VERT. \_\_\_\_\_  
 08025-4 PLAN NO. 102-0013-008r001