


DETAIL 'A' - DUCK BILL ASSEMBLY

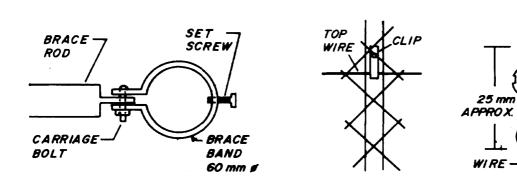

DETAIL 'C' - CABLE OR MESH CLIP

6.35 mm **ø** BOLT

NOTE S:

DETAIL 'B' - BRACE BAND

- I. MAXIMUM SPACING BETWEEN BRACING SHALL BE 150 METRES.
- 2. TOP WIRE ONLY IS TO BE THREADED THROUGH CLIPS WITH MESH ATTACHED TO WIRE.
- 3. CHAIN LINK FABRIC SHALL BE FASTENED AT NOT MORE THAN 35 cm ON LINE POSTS AND NOT MORE THAN 45 cm ON THE TOP AND BOTTOM WIRE.
- 4. TOP WIRE WILL BE 6.4 mm 7 STRAND GUY WIRE, GRADE 50.
- 5. ALL MATERIALS AND INSTALLATION TO MEET STANDARD SPECIFICATION FOR . SUPPLY AND ERECTION OF CHAIN LINK FENCE.

REVISIONS	CHAIN LINK FENCE TYPE A ENGINEER ENGINEER SCALES: HOR. N.T.S. VERT.	APPROVED
2		
3 DRAWN BY		ENGINEER PARLE
DATE 97 11 18		PLAN NO: 102-0004-006r001