

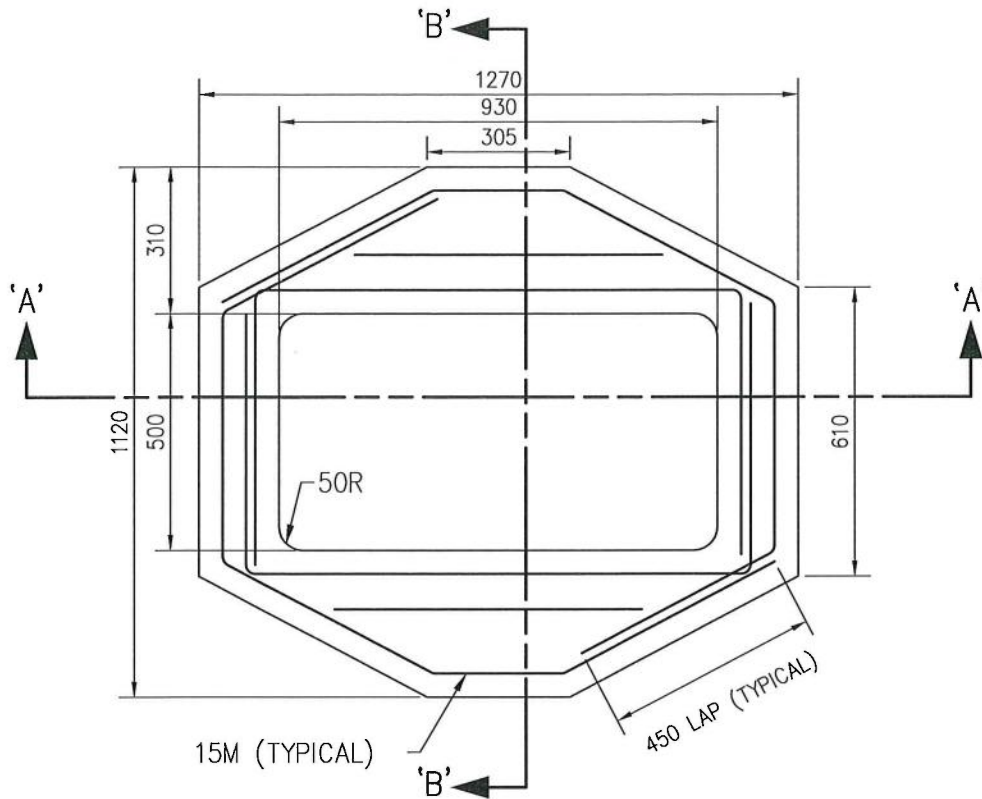


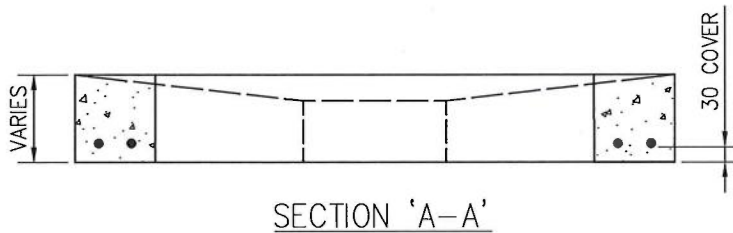

PLAN

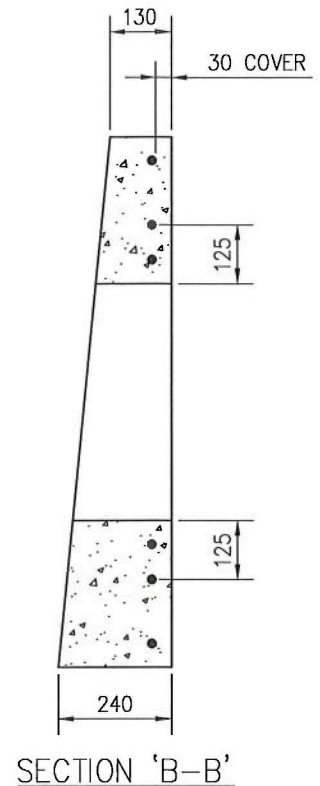

MATERIAL SPECIFICATIONS:

(ALL SPECIFICATIONS & STANDARDS REFER TO LATEST EDITION)

- CEMENT: SULPHATE RESISTANT TYPE: TYPE HS (TYPE 50) TO CSA A3001 OR TYPE V TO ASTM C150
- CONCRETE COMPRESSIVE STRENGTH: 30 MPa AT 28 DAYS
- AIR CONTENT: 4 TO 7% EXCEPT WHERE NO-SLUMP CONCRETE IS USED
- CONCRETE CLEAR COVER: 30mm MIN
- REINFORCING STEEL: DEFORMED BARS TO CSA G30.18, $f_y = 400 \text{ MPa}$ TO BE 15M BARS

PLAN DESCRIPTION/REVISION		DATE	BY	APPROVALS	
1	ORIGINAL STANDARD DRAWING	2020-JAN-30	DLH	City of Saskatoon CATCH BASIN PRECAST SLAB TOP TYPE K-2 SIGNATURE: <i>[Signature]</i> NAME: <i>AWAR CUG</i> DATE SIGNED: <i>18 Feb 2020</i>	
				SIGNATURE: <i>[Signature]</i> NAME: <i>Mark Jurgewicz</i> DATE SIGNED: <i>FEB 20 2020</i> SCALE: <i>N.T.S.</i> PLAN NO.: <i>102-0010-027r001</i>	